


MT™ RFID Installation Instructions

All parts needed to install the MT™ RFID lock are included with each unit. Please check to make sure all parts are accounted for before beginning installation. Do not substitute any of the parts. The use of substitute parts will result in poor performance of the lock.

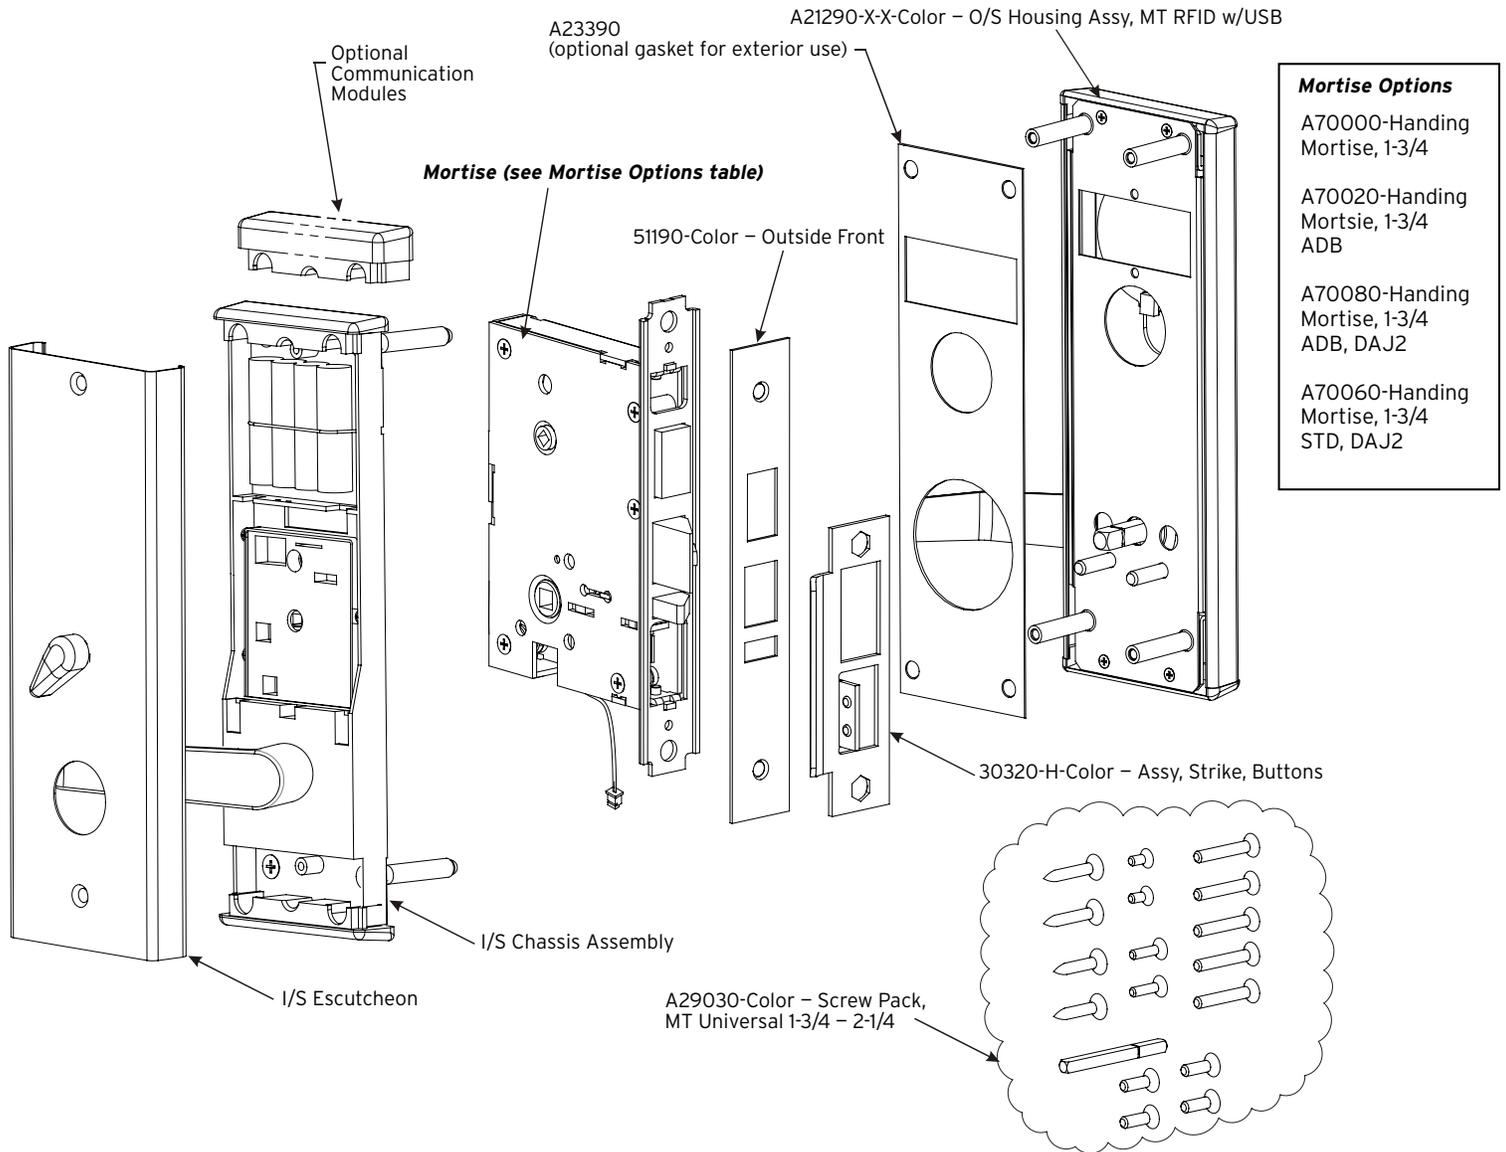

All information contained herein, including but not limited to product pricing and other intellectual property, is confidential and intended for the sole use of the addressee(s) so named. Any misuse of this confidential information contained herein may result in legal action by Computerized Security Systems dba SAFLOK and its parent company.

Preparing the door and door frame

1. Prepare the door using the MT RFID installation template or drill fixture. The door edge prep is a standard, full-mortise prep for a 1-1/4" x 8" front plate (1" x 8" and 1" x 7-3/4" custom front plates are optional). The door surface holes and mortise are customized for the SAFLOK trim.

Important: Some holes are only on the inside surface of the door. See the door prep template.

- For new construction installations, the door manufacturer may prepare the door using the installation template.
- For retrofit installations, remove the existing hardware and confirm that the existing door edge prep is appropriate for the SAFLOK mortise lock.

Drill fixture: If you are using a SAFLOK MT drill fixture, position and clamp the fixture on the door. Do NOT drill the four holes for the card reader as illustrated in Fig. 1 below; instead, drill the hole shown in Fig. 2. The fixture has two positioning posts that rest inside the mortise, establishing the proper backset for the trim. When the fixture is clamped, its surfaces should be parallel with the door surfaces and door edges. Not all holes go through the door (refer to the template). Notch the material on the inside surface for easier routing of the motor wire. After machining, remove any debris from the mortise and cutouts.

2. Prepare the door frame using the template and install the strike plate using the screws provided (12 x 1-1/2 screws for wood frames, 12-24 x 3/8 screws for metal frames).

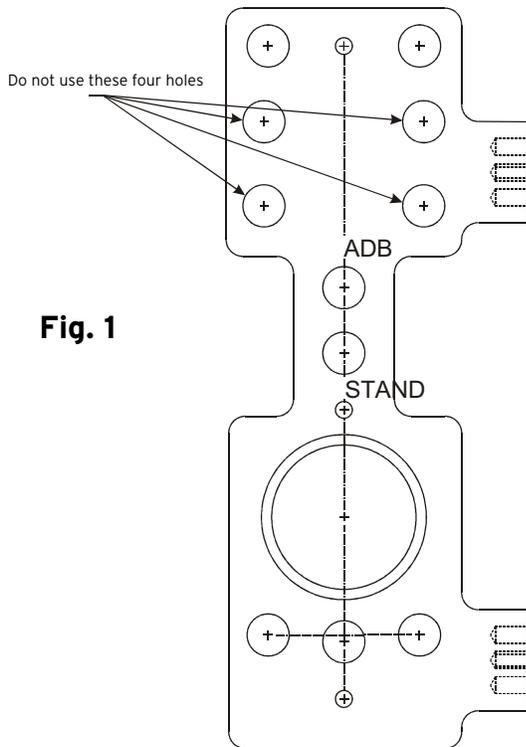


Fig. 1

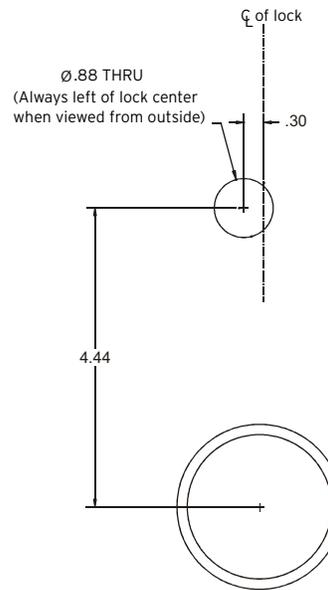


Fig. 2

Note: The hole shown above is not located on the drill fixture. Use these measurements to locate the hole.

Preparing the door and door frame (continued)

- The mortise plate has an adjustable bevel. Align the mortise front plate with the bevel of the door edge and tighten the two bevel adjustment screws at the top and bottom of the mortise case. Position the mortise case in the door edge with the motor wire routed through the notch (see Fig. 3).

Note: Use care to ensure that the wires do not get pinched or pulled as the mortise is inserted into the pocket.

- Attach the mortise front plate to the door using the two mortise screws (12 x 1-1/4 screws for wood doors, 12-24 x 3/8 screws for metal doors). Be sure that the screws are fully tightened.

Important: DO NOT leave the mortise screws loose. The screws must be fully tightened before the trim is installed. If you must leave the mortise loose to install the trim, the door preparation is incorrect.

- Install the scalp plates with the 8-32 x 1/4 screws provided and test for proper mechanical latch engagement into the strike plate.

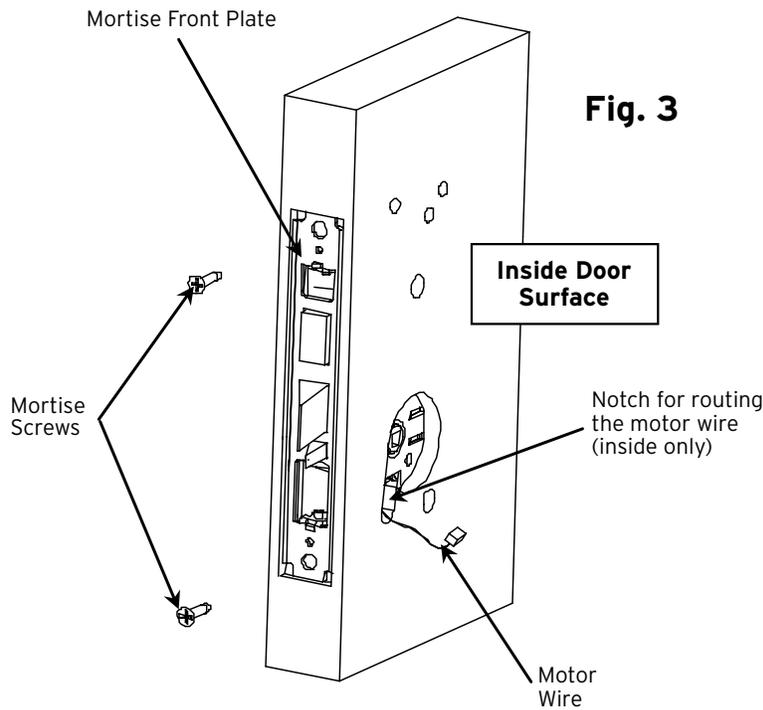


Fig. 3

	dormakaba Austria GmbH Ulrich-Bremi-Straße 2 3130 Herzogenburg Österreich
0432-CPR-00072-03	19
EN 14846: 2008	3 / S / 5 / D / 0 / G / 3 / 0 / 3
ESM MORTISE	DOP_0175

	dormakaba Austria GmbH Ulrich-Bremi-Straße 2 3130 Herzogenburg Österreich
0432-CPR-00072-03	19
EN 14846: 2008	3 / S / 5 / D / 0 / G / 3 / 0 / 3
ASM MORTISE	DOP_0175

Installing the lock trim

Both the outside and inside trim assemblies have 1/4" alignment pins that fit into holes in the mortise case. These pins establish an accurate trim position with respect to the mortise case assembly, allowing the levers and bolt mechanism to operate freely without binding. The holes machined in the door surfaces should not influence the trim's position.

There should be clearance between the features of the outside trim and the door prep holes. If the outside trim fits tightly because the through bolt posts or card reader enclosure rubs on the door prep holes, then remove the mortise and enlarge the holes to achieve a free fit. Under no circumstances should the 1/4" alignment pins be bent or removed to allow a free fit.

1. Remove the battery pack and retaining spring.
2. Position the outside trim on the door with the card reader ribbon and power wire cable passing through the 0.88" hole. Be sure that the ribbon cable and power wire does not get pulled, creased or cut. On metal doors, it may be necessary to deburr the inside rectangular hole or insulate the bottom edge of the rectangular hole with a piece of tape. SAFLOK spacer plates will be required for doors less than 1-3/4" thick. * Be sure ribbon and power wire are completely pulled through the lock housing to ensure neither are pinched between the door and the lock chassis.
3. Route the ribbon cable and power wire through the rectangular hole in the inside trim. This hole is located above printed circuit board (PCB) assembly. Route the motor wire through the wire channel in the inside trim closest to the door edge. These holes are located below the PCB (see Fig. 4).
4. Position the inside trim on the inside of the door ensuring that the reader ribbon and power wire do not get pinched.
5. Secure inside trim to the outside trim using four M5 x 0.8 screws.

Important: Do not fully tighten the screws at this point.

6. Once the outside trim is fully secured, check the alignment of the inside trim and be sure that the both levers rotate without binding. Once the trim is properly aligned, fully tighten the screws that secure the card reader assembly to the door and check for proper rotation.
7. Place the battery pack in position above the PCB and secure it in place using the retaining spring. Be sure that the battery wire is routed through the lower left corner of the battery compartment (see Fig. 4).

Note: Do not plug in the battery until the other connections have been made at the circuit board.

Installing the lock trim (continued)


9. Connect ribbon cable, motor wire, and reader power wire to the PCB. See Fig. 4.
10. Watch for the green LED on the card reader to flash four times while you connect the battery wire to the PCB. The green light indicates that the PCB has reset.

Important: The battery wire should be the last connection made to the PCB.

11. With the dead bolt retracted, insert the long end of the dead bolt spindle assembly through the PCB switch cam hole and into the mortise dead bolt hub. When the mortise dead bolt is retracted, the indicator marks on the switch cam should be at the right (3:00 position) for ADB mortises or at the bottom (6:00 position) for standard mortises (see Fig. 4). Position dead bolt spindle assembly into cam assembly. The retaining ring should rest on the switch cam when fully inserted (the proper positioning of the cam will allow the door to be opened when the dead bolt is retracted and block entry when the dead bolt is thrown for privacy, except when emergency keycards are used).


Important: As illustrated in Fig. 4, be sure that the cam is in correct orientation.

12. Install the inside escutcheon with the thumb turn pointed upward.

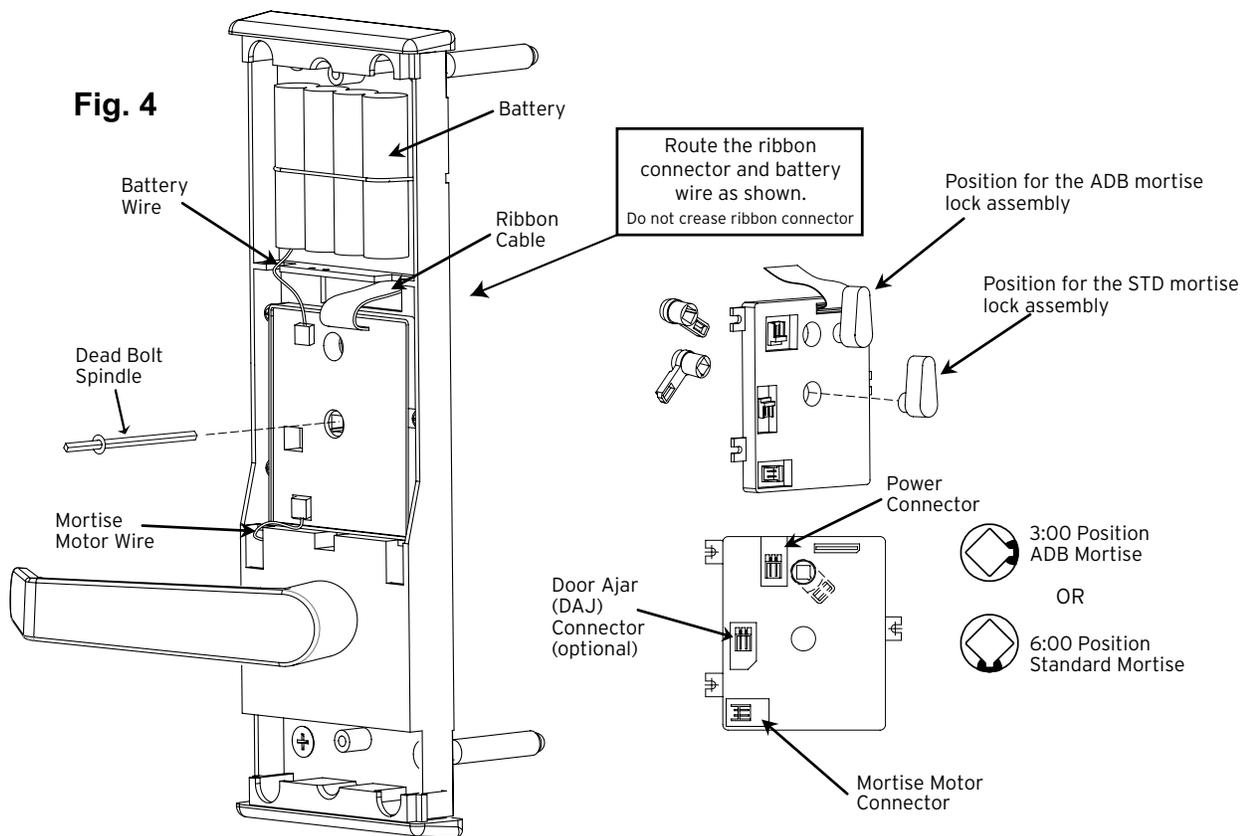

Installing the lock trim (continued)

13. Secure the inside trim cover to the inside trim using two M4 x 16mm Torx screws (see Fig. 5).

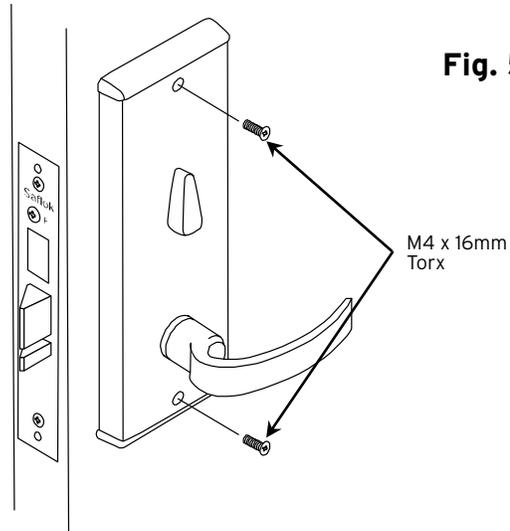

14. Program the lock using the Lock Programmer and Interrogator (LPI) probe (p# 72400) with the Hand Held Terminal.
*The programming port is located in the bottom of the outside lock trim.

Test the functioning of the lock as discussed in the following section and in the programming manual before closing the door. When the construction key is used, the green and red LEDs will blink together, indicating that the lock's time and date are not set.

15. For locks installed in exterior applications. After programming, inject dielectric grease into the programming port to prevent moisture from damaging the electronics.

Testing Lock Functionality

Pass a Construction key over the Quantum RFID reader. The green light will flash for five seconds. Be sure that the green light flashes for five seconds while the exterior lever remains operable. If the green light does not flash, refer to the table below.

Lock Communication	Electronic Function Description
Red and green LEDs flash nine times simultaneously or for 5 seconds	Time and date not set, use the Hand held and Quantum RFID LPI probe to reset
Yellow LED flashes 12 times	Dead bolt is thrown or switch cam is not properly aligned
Yellow LED flashes two times	Keycard not allowed OR keycard cancelled by new keycard
Red and green LEDs flash alternately nine times	Low battery (contact the SAFLOK service department)
Yellow and red LEDs flash two times simultaneously	Bad keycard read or corrupted data (may require new keycard) - Error logging to keycard. Hold keycard in front of the lock reader longer.
Red and yellow LED flashes two times	Keycard not read (Key reader may be damaged)

SAFLOK Door Unit Inspection Criteria

Appearance

- Finish is free of blemishes or scratches that would distract from lock appearance
- Lock body and under plate (if used) are mounted straight on the door
- Door scalp is mounted straight and flush with the door edge
- Jamb strike is mounted straight and is flush with the jamb face
- Correction of minor blemishes on the door jamb are the responsibility of the property's maintenance department

Lock Function

- Knob or lever rotates and moves freely
- Lever is horizontal to floor when at rest position
- Dead bolt extends fully and retracts without binding (door open)
- Lock latch and dead bolt engage jamb strike plate freely
- Anti-pick latch when depressed (door open)
- Anti-pick latch is depressed when contact is made with the strike plate (door closed)

Electronics/Keycards

- Green light flashes when the proper keycard is used
- Green light is flashing when the lever is operated
- Green light continues to flash for a five-second cycle
- Yellow light flashes 12 times when the dead bolt is extended and a guest/hotel keycard is used
- All keycards function to the specifications of the properties key design

Door function

- Door closes and latches with little or no interference
- Dead bolt extends fully through the strike plate without interference (door closed)
- Spacing between door edge and inside door jamb does not exceed 3/16" (door closed)

Note: If bumpers or other seals are added after strike plate installation and causes alignment and latch problems, it is the property's responsibility to correct this condition. This note generally applies to new construction or new door installation

Questions? Call Customer Service at 800.999.6213 and select option 3. For online assistance, visit support.saflok.com.

FCC and IC Warnings: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.



For worldwide office locations and contact information, visit us at www.kabahospitality.com

USA·Canada

Phone: **877.272.3565**

Europe · Middle East · Africa

Phone: **33.1.30.13.04.04**

Asia

Phone: **86.10.5861.3561**

Manufactured under one or more of the following patents:

U.S.: 4,177,657; 4,411,144; 4,534,194; 4,890,870; 5,198,643; 5,477,041; 5,820,177; 5,986,564; 7,051,561; D494,841; D501,131; D512,899; D519,021; D531,629; D533,009; D533,047; D533,762; D533,763; D535,629 CANADA: 1,252,854; 1,298,902
U.K. 2,010,375

Other U.S. and foreign patents pending

SAFLOK reserves the right to modify the characteristics and features of all products in this publication.
© 2012 SAFLOK, all rights reserved.